

# Kepler CMOS Camera

## KL6060 FI

### 6K x 6K with 10 micron pixels

The very large imaging area of the KL6060 FI scientific CMOS camera provides high sensitivity with low noise, even at multiple frames per second. The camera offers 4x the area of comparably priced 2K x 2K back illuminated CCD cameras.


#### Technical Data

<b>Sensor Type</b>	Front Illuminated CMOS
<b>Sensor</b>	GPixel GSense6060 FI
<b>Shutter Type</b>	Rolling
<b>Active Pixels</b>	6144 x 6144
<b>Pixel Size (microns)</b>	10 x 10 $\mu\text{m}$
<b>Imaging Area (Diagonal)</b>	61.4 X 61.4 mm (86.8 mm)
<b>Full Well Capacity</b>	128000 electrons
<b>Typical Readout Noise (e<sup>-</sup>)</b>	4.6 e <sup>-</sup>
<b>Dynamic Range</b>	88.5 dB
<b>Frame Rate</b>	19 fps (QSFP)
<b>Cooling Method<sup>1</sup></b>	Air and Liquid
<b>Max. Cooling (Air)</b>	45°C below ambient
<b>Temperature Stability</b>	0.1°C
<b>Dark Current (typical)</b>	0.07 eps at -20C
<b>Interface</b>	USB 3.0 (Optional QSFP <sup>2</sup> )
<b>Data Bit Depth</b>	16 bit <sup>3</sup>
<b>Optional Shutter</b>	90mm
<b>Optional Mounts</b>	Medium Format Recommended (6x7)
<b>Subarray Readout</b>	Standard
<b>External Trigger In/Out</b>	Standard
<b>SDK / Software</b>	Kepler SDK / FLI Pilot
<b>Weight</b>	8.1 lbs (3.6 kg)

<sup>1</sup> Liquid circulation connectors sold separately



<sup>2</sup> QSFP = Quad Small Form factor Pluggable: high speed fiber optic interface

<sup>3</sup> 16-bit data merged from two 12 bit converters

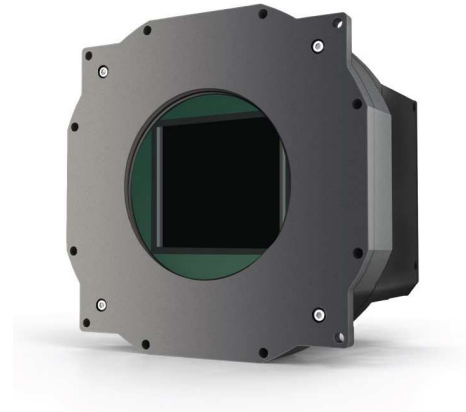

Also available with 90mm shutter

#### Absolute Quantum Efficiency

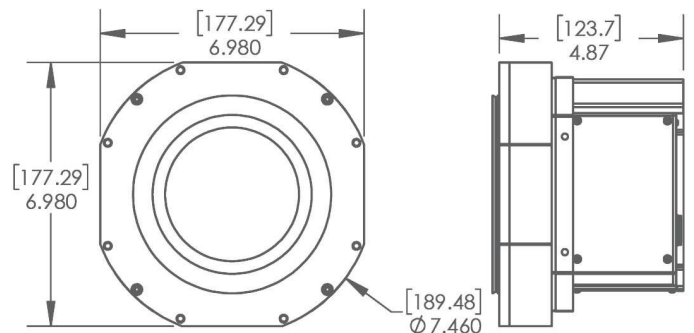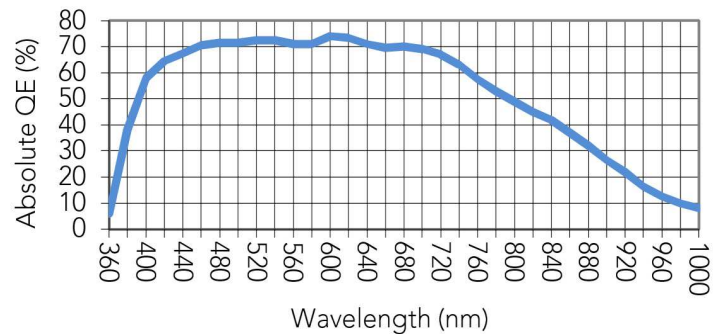

See [www.flicamera.com](http://www.flicamera.com) for alternate configurations



MADE IN USA

Finger Lakes Instrumentation  
[www.flicamera.com](http://www.flicamera.com)  
USA 585-624-3760