

MicroLine ML3200

Quality. Cooled. Cameras.

2184 x 1472 Imaging Array

6.8 μm Pixel Size

At 3.7 x 3.7 x 4.8 inches the MicroLine is a small camera with big camera capabilities. Each component of the MicroLine camera is designed and manufactured for a long life in the most demanding conditions. MicroLine download speeds are fast yet maintain the 16-bit resolution necessary to produce high quality images. MicroLine cameras can achieve up to 60°C below ambient cooling without water assist. Simply set the MicroLine cooling where you want it and the camera will do the rest, quickly and without worries.



Applications

- Digital Radiography
- Astronomy
- Bioluminescence
- Chemiluminescence
- Gel Documentation
- Forensic Imaging
- Satellite Imaging
- Low Light Level Imaging

Features	Benefits
1 MHz and 6 MHz digitization	Fast Image capture with full 16-bit resolution
2184 x 1472 Array with 6.8 μm pixels	Resolves fine detail
Flexible binning and readout	Increases frame rate
Thermoelectric Cooling to 60°C Below Ambient	Excellent low-noise imaging
Excellent quantum efficiency	High sensitivity for fast image acquisition
C-Mount; optional Nikon F-Mount or Canon mount	Wide variety of optical choices
Acquisition software included	Ease of integration with open source SDK
USB 2.0 interface	Industry standard connectivity; fast data transfer



Engineering Excellence

Because Your Image Depends On It.


1250 Rochester St.
Lima NY 14485 · USA
585 624 3760
sales@flicamera.com
www.flicamera.com

*Due to continuous development, all specifications subject to change without notice.

Sensor Specifications (from manufacturer)

Sensor	On Semi KAF-3200ME	Sensor Size	14.8 X 10 mm	Megapixels	3.2
Pixels	2184 x 1472	Sensor Diagonal	17.8 mm	Video Size (inch)	1.1
Pixel Size	6.8 μ m	CCD Variants			
Full Well Capacity	55000 electrons	CCD Grades	Standard (Grade 2)		
Color Options	Monochrome only	Anti-Blooming	None		
CCD Type	Full frame				

Sensor Quantum Efficiency (Absolute)

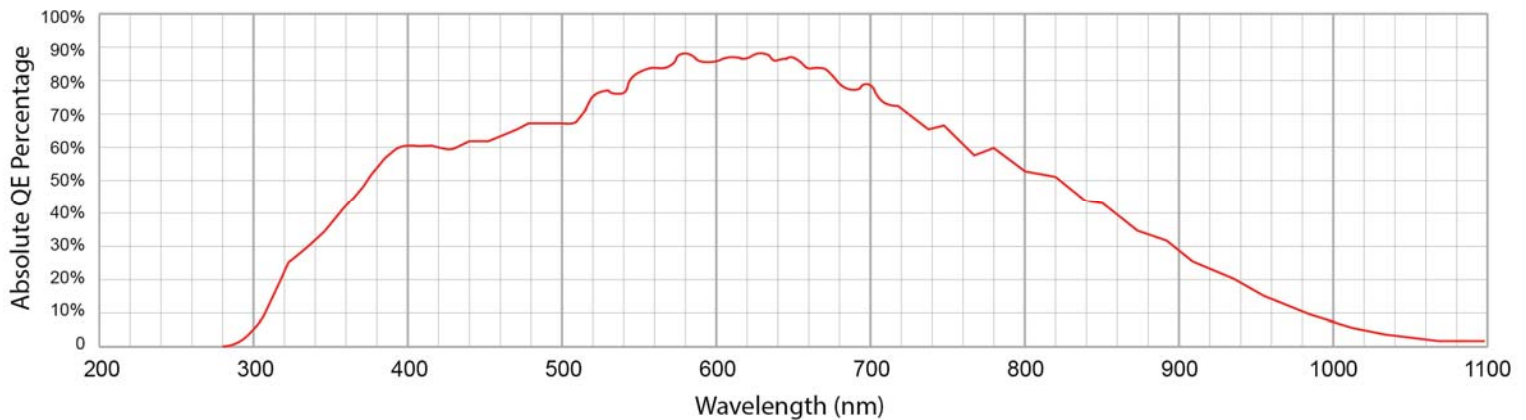

Camera Performance

Typical Maximum Cooling	60°C below ambient	Dark Current (typical)	0.003 electrons/pixel/sec at -40°C
Temperature Stability	0.1°C	Cooling Method	Air (Optional liquid)
Digitization Speed	1 MHz; 6 MHz (software selectable)		
Typical System Noise	9 e- at 1 MHz; 13 e- at 6 MHz	Non-Linearity	<1%
Housing Dimensions	3.7 X 3.7 X 4.77 inches (9.3 X 9.3 X 12.1 cm)	Weight	2.8 lbs (1.2 kg)
Focal Plane to Face Plate	15.7 mm		
Lens Mounts	C-Mount; optional Nikon F-Mount or Canon mount		
Interface	USB 2.0	Camera Channels	1
Available Shutters	25mm		
External Triggering	Standard		
Environment	-30°C to 45°C 10% - 90% Relative Humidity		
Power	12V (100-240V AC to 12V DC power supply included). With TEC off: <1A. TEC at 100%: 4.4A. Shutter open: 4A pulse for 100msec. Shutter held open, add 0.22A.		



Engineering Excellence

Because Your Image Depends On It.

1250 Rochester St.
Lima NY 14485 · USA
585 624 3760
sales@flicamera.com
www.flicamera.com