

# MicroLine ML16803

Quality. Cooled. Cameras.

## 4096 x 4096 Imaging Array

## 9 $\mu\text{m}$ Pixel Size

At 3.7 x 3.7 x 4.8 inches the MicroLine is a small camera with big camera capabilities. Each component of the MicroLine camera is designed and manufactured for a long life in the most demanding conditions. MicroLine download speeds are fast yet maintain the 16-bit resolution necessary to produce high quality images. MicroLine cameras can achieve up to 60°C below ambient cooling without water assist. Simply set the MicroLine cooling where you want it and the camera will do the rest, quickly and without worries.



### Features

### Benefits

Up to 8 MHz digitization

Fast Image capture with full 16-bit resolution

4096 x 4096 Array with 9  $\mu\text{m}$  pixels

Resolves fine detail

Flexible binning and readout

Increases frame rate

Thermoelectric Cooling to 50°C Below Ambient

Excellent low-noise imaging

Excellent quantum efficiency

High sensitivity for fast image acquisition

700 kHz and 2 MHz digitization

Wide variety of optical choices

Acquisition software included

Ease of integration with open source SDK

USB 2.0 interface

Industry standard connectivity; fast data transfer



## Engineering Excellence

*Because Your Image Depends On It.*


1250 Rochester St.  
Lima NY 14485 · USA  
585 624 3760  
sales@flicamera.com  
www.flicamera.com

\*Due to continuous development, all specifications subject to change without notice.

## Sensor Specifications (from manufacturer)

<b>Sensor</b>	On Semi KAF-16803	<b>Sensor Size</b>	36.8 X 36.8 mm	<b>Megapixels</b>	16
<b>Pixels</b>	4096 x 4096	<b>Sensor Diagonal</b>	52 mm	<b>Video Size (inch)</b>	3.3
<b>Pixel Size</b>	9 $\mu$ m	<b>CCD Variants</b>			
<b>Full Well Capacity</b>	100,000 electrons	<b>CCD Grades</b>	Standard		
<b>Color Options</b>	Monochrome only	<b>Anti-Blooming</b>	100X		
<b>CCD Type</b>	Full frame				

## Sensor Quantum Efficiency (Absolute)

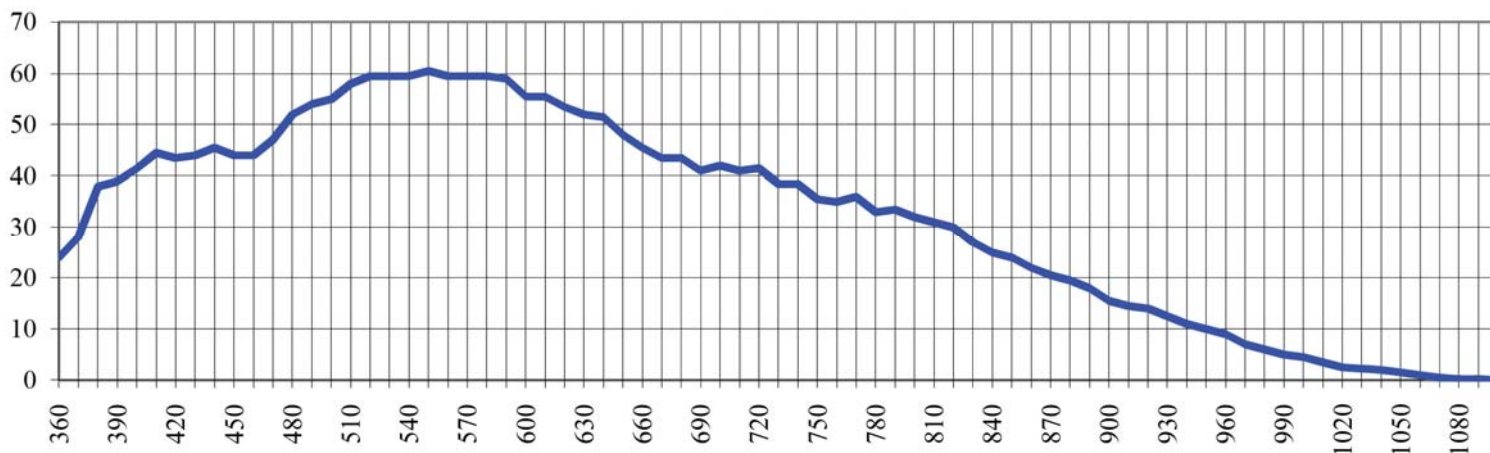

## Camera Performance

<b>Typical Maximum Cooling</b>	50°C below ambient	<b>Dark Current (typical)</b>	<0.01 electrons/pixel/sec at -30°C
<b>Temperature Stability</b>	0.1°C	<b>Cooling Method</b>	Air (Optional liquid)
<b>Digitization Speed</b>	1 MHz and 8 MHz		
<b>Typical System Noise</b>	10 e- at 1 MHz; 15 e- at 8 MHz	<b>Non-Linearity</b>	<1%
<b>Housing Dimensions</b>	3.7 X 3.7 X 4.77 inches (9.3 X 9.3 X 12.1 cm)	<b>Weight</b>	4.5 lbs (2 kg)
<b>Focal Plane to Face Plate</b>	21 mm		
<b>Lens Mounts</b>	Optional Nikon F-mount and Canon EOS mount		
<b>Interface</b>	USB 2.0	<b>Camera Channels</b>	1
<b>Available Shutters</b>	65 mm	<b>Shutter MTBF</b>	1000000
<b>External Triggering</b>	Standard		
<b>Environment</b>	-30°C to 45°C   10% - 90% Relative Humidity		
<b>Power</b>	12V (100-240V AC to 12V DC power supply included). With TEC off: <1A. TEC at 100%: 4.4A. Shutter open: 4A pulse for 100msec. Shutter held open, add 0.22A.		



## Engineering Excellence

*Because Your Image Depends On It.*

1250 Rochester St.  
Lima NY 14485 · USA  
585 624 3760  
sales@flicamera.com  
www.flicamera.com