

# MicroLine ML8300

Quality. Cooled. Cameras.

## 3326 x 2504 Imaging Array

## 5.4 $\mu\text{m}$ Pixel Size

At 3.7 x 3.7 x 4.8 inches the MicroLine is a small camera with big camera capabilities. Each component of the MicroLine camera is designed and manufactured for a long life in the most demanding conditions. MicroLine download speeds are fast yet maintain the 16-bit resolution necessary to produce high quality images. MicroLine cameras can achieve up to 60°C below ambient cooling without water assist. Simply set the MicroLine cooling where you want it and the camera will do the rest, quickly and without worries.



### Applications

- Digital Radiography
- Astronomy
- Bioluminescence
- Chemiluminescence
- Gel Documentation
- Forensic Imaging
- Satellite Imaging
- Low Light Level Imaging

### Features

### Benefits

8 MHz digitization	Fast Image capture with full 16-bit resolution
3326 x 2504 Array with 5.4 $\mu\text{m}$ pixels	Resolves fine detail
Flexible binning and readout	Increases frame rate
Thermoelectric Cooling to 55°C Below Ambient	Excellent low-noise imaging
Excellent quantum efficiency	High sensitivity for fast image acquisition
Optional F-mount	Wide variety of optical choices
Acquisition software included	Ease of integration with open source SDK
USB 2.0 interface	Industry standard connectivity; fast data transfer



### Engineering Excellence

*Because Your Image Depends On It.*


1250 Rochester St.  
Lima NY 14485 · USA  
585 624 3760  
sales@flicamera.com  
www.flicamera.com

\*Due to continuous development, all specifications subject to change without notice.

## Sensor Specifications (from manufacturer)

<b>Sensor</b>	Truesense KAF-8300	<b>Sensor Size</b>	17.9 X 13.5 mm	<b>Megapixels</b>	8.3
<b>Pixels</b>	3326 x 2504	<b>Sensor Diagonal</b>	22.4 mm	<b>Video Size (inch)</b>	1.4
<b>Pixel Size</b>	5.4 $\mu$ m	<b>CCD Variants</b>			
<b>Full Well Capacity</b>	25,500 electrons	<b>CCD Grades</b>	Standard		
<b>Color Options</b>	Monochrome	<b>Anti-Blooming</b>	1000x		
<b>CCD Type</b>	Front Illuminated				

## Sensor Quantum Efficiency (Absolute)

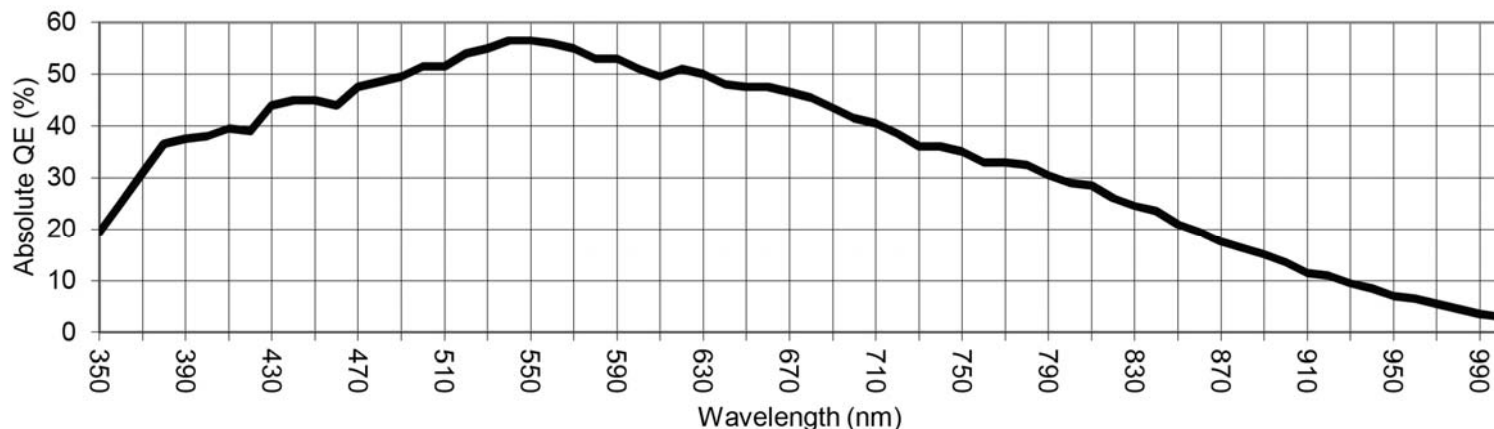

## Camera Performance

<b>Typical Maximum Cooling</b>	55°C below ambient	<b>Dark Current (typical)</b>	<0.001 electrons/pixel/sec at -35°C
<b>Temperature Stability</b>	0.1 C	<b>Cooling Method</b>	Air (Optional liquid)
<b>Digitization Speed</b>	8 MHz		
<b>Typical System Noise</b>	11 e- RMS @ 8 MHz	<b>Non-Linearity</b>	<1%
<b>Housing Dimensions</b>	3.7 X 3.7 X 4.77 inches (9.3 X 9.3 X 12.1 cm)	<b>Weight</b>	2.8 lbs (1.2 kg)
<b>Focal Plane to Face Plate</b>	24.96 mm		
<b>Lens Mounts</b>	F-Mount	<b>Camera Channels</b>	
<b>Interface</b>	USB 2.0	<b>Shutter MTBF</b>	1000000
<b>Available Shutters</b>	25 mm		
<b>External Triggering</b>	Standard		
<b>Environment</b>	-30°C to 45°C   10% - 90% Relative Humidity		
<b>Power</b>	12V (100-240V AC to 12V DC power supply included). With TEC off: <1A. TEC at 100%: 4.4A. Shutter open: 4A pulse for 100msec. Shutter held open, add 0.22A.		



## Engineering Excellence

*Because Your Image Depends On It.*

1250 Rochester St.  
Lima NY 14485 · USA  
585 624 3760  
sales@flicamera.com  
www.flicamera.com